


Job Name:		Location:	
Purchaser:		Submitted By:	
Submitted To:		Engineer:	
Date:		Application:	

☐ Reference
 ☐ Approval
 ☐ Construction

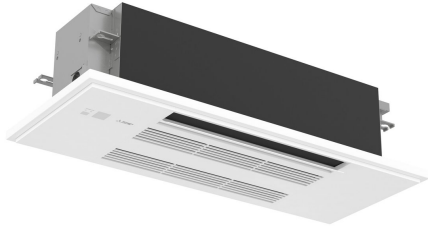

Basic product info.

IDU Model Number	MLZ-KX06NL	
------------------	------------	--

Electrical

Rated Voltage (Min)	208	
Rated Voltage (Max)	230	
IDU Minimum Circuit Ampacity (MCA) if Powered Separate	1	
Voltage: Indoor - Outdoor, S1-S2	208/230	
Rated Voltage	208 / 230	

Indoor Unit

IDU Fan Motor Output	30	
IDU Airflow Rate at Heating 1	152	
IDU Airflow Rate at Heating 2	173	
IDU Airflow Rate at Heating 3	194	
IDU Airflow Rate at Heating 4	212	
IDU Airflow Rate at Cooling, Dry 1	152	
IDU Airflow Rate at Cooling, Dry 2	166	
IDU Airflow Rate at Cooling, Dry 3	184	
IDU Airflow Rate at Cooling, Dry 4	198	
IDU Unit Dimension W (inch)	33 3/16	
IDU Unit Dimension D (inch)	11 7/8	
IDU Unit Dimension H (inch)	7 11/16	
IDU Unit Weight (lbs)	25	

Refrigerant

Refrigerant Type	R454B	
------------------	-------	--

Accessories

Wall Mount controller	PAR-42MAACAB (Requires system control interface)	
Simple Wall MA Controller	PAC-YT53CRAU-J	
Simple CN105 Controller	PAC-SDW01RC-CA1	
Remote Controller English	MAC-FL117M-E	
Remote Controller French	MAC-FL217M-E	
Grille	MLP-448WU	
Wi-Fi Adapter	PAC-USWHS002CN-1	

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) (* Windscreens required for cooling operations below 23°F (-5°C))


- ¹ Cooling (Indoor // Outdoor) 80°F (26.6°C) DB, 67°F (19.4°C) WB // 95°F (35°C) DB, 75°F (23.9°C) WB
- ² Heating at 47°F (8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 47°F (8.3°C) DB, 43°F (6.1°C) WB
- ³ Heating at 17°F (-8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 17°F (-8.3°C) DB, 15°F (-9.4°C) WB
- tHeating at 5°F (-15°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 5°F (-15°C) DB, 4°F (-15.6°C) WB
- uHeating at -4°F (-20°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // -4°F (-20°C) DB, -15°F (-26.1°C) WB

MLZ-KX06NL


Unit: inch

INDOOR UNIT


INDOOR UNIT OUTLINE DRAWING

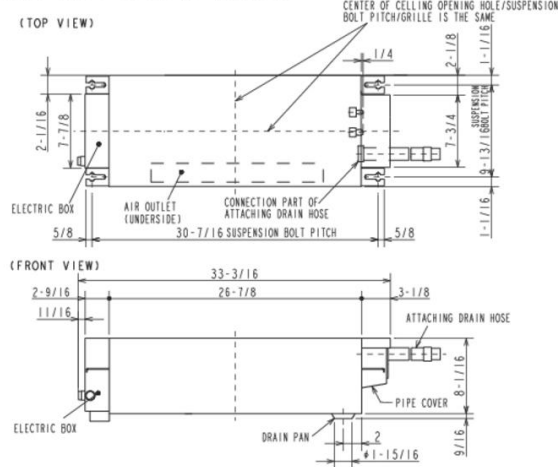


REMOTE CONTROLLER OUTLINE DRAWING



(RIGHT SIDE VIEW)

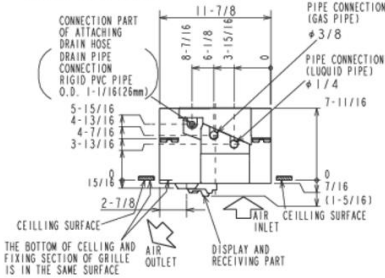


GRILLE OUTLINE DRAWING (MLP-448WU)

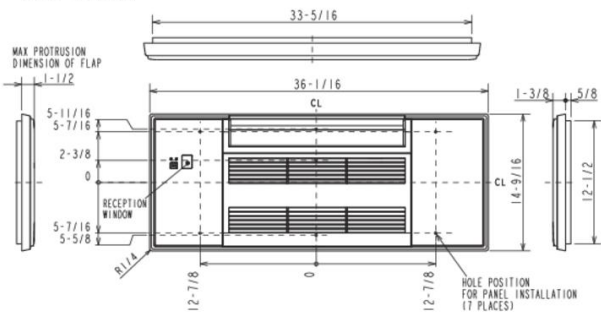

EXTENSION PIPE	LIQUID PIPE O.D.	1/4	
	GAS PIPE O.D.	3/8	
CONNECTION OF PIPE	LIQUID PIPE	FLARED CONNECTION 1/4	
	GAS PIPE	FLARED CONNECTION 3/8	
DRAIN HOSE	HEAT INSULATOR O.D.		CONNECTION I.D.
	5/16		1
DRAIN PIPE CONNECTION	RIGID PVC PIPE O.D.		EFFECTIVE LENGTH
	1-1/16(26mm)		18-15/16

NOTE: CUT THE DRAIN HOSE (ACCESSORY) FOR USE, IF NECESSARY.

INDOOR UNIT DETAIL VIEW (TOP VIEW)

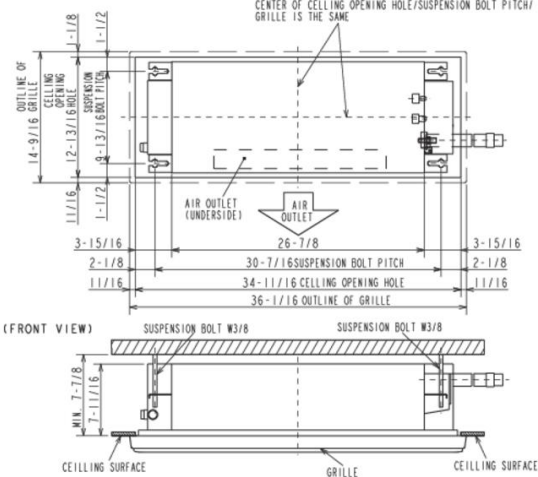

THE METHOD FOR STANDING DRAIN FROM INDOOR UNIT
 ■ CUT THE DRAIN HOSE (ACCESSORY) FOR USE, IF NECESSARY.

