

Job Name:		Location:	
Purchaser:		Submitted By:	
Submitted To:		Engineer:	
Date:		Application:	

☐ Reference

☐ Approval

☐ Construction



Basic product info.

IDU Model Number	SVZ-AP30NL	
------------------	------------	--

Electrical

Rated Voltage (Min)	208	
Recommended Fuse/Breaker Size	30	
Voltage: Indoor - Outdoor, S1-S2	208/230	
IDU Minimum Circuit Ampacity (MCA)	4.13	
Rated Voltage	208 / 230	

Indoor Unit

IDU Unit Dimension W (inch)	21	
IDU Unit Dimension D (inch)	21 5/8	
IDU Unit Dimension H (inch)	43 7/8	
IDU Unit Weight (lbs)	122	
IDU Airflow Rate, Cooling (Dry) CFM	613, 744, 875	
IDU Airflow Rate, Heating CFM	613, 744, 875	

Piping

IDU Liquid Pipe Size O.D. [Flared]	3/8	
IDU Gas Pipe Size O.D. [Flared]	5/8	

Refrigerant

Refrigerant Type	R454B	
------------------	-------	--

Accessories


Wall Mount controller	PAR-42MAACAB	
Simple Wall MA Controller	PAC-YT53CRAU-J	
Simple CN105 Controller	PAC-SDW01RC-CA1	
Remote Controller English	PAR-FA32MA-W	
Remote Controller French	PAR-FL32MA-E	
NA T-STAT Interface	RMF-CA100	
Wi-Fi Adapter	PAC-USWHS002CN-1	
NOTES	PUMY Branch Box Compatable	

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) (* Windscreens required for cooling operations below 23°F (-5°C))

- ¹ Cooling (Indoor // Outdoor) 80°F (26.6°C) DB, 67°F (19.4°C) WB // 95°F (35°C) DB, 75°F (23.9°C) WB
- ² Heating at 47°F (8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 47°F (8.3°C) DB, 43°F (6.1°C) WB
- ³ Heating at 17°F (-8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 17°F (-8.3°C) DB, 15°F (-9.4°C) WB
- ^tHeating at 5°F (-15°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 5°F (-15°C) DB, 4°F (-15.6°C) WB
- ^uHeating at -4°F (-20°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // -4°F (-20°C) DB, -15°F (-26.1°C) WB

SVZ-AP30NL

Units: mm (in.)

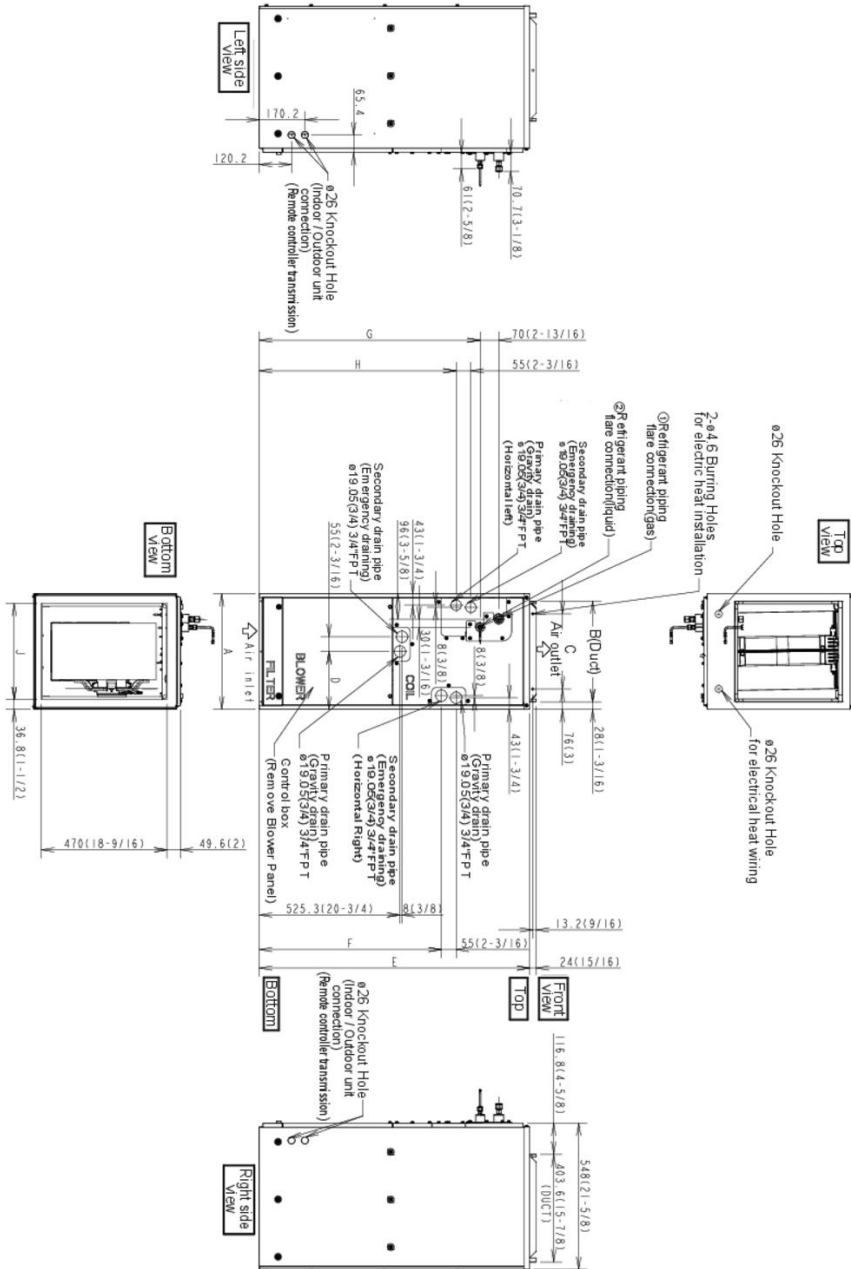

Provide enough clearance in front of unit for service and maintenance. Electrical entrance for SVZ located on both left and right side of the cabinet. See the right or left side view for knockout locations.

